



DEEP ROOF LIGHTING SK linear strip with high bay list items

Wattages: 2FT/4FT/8FT, from 10W to 90W



SK-HB Linear Fixture Series includes 2",4"and 8"designed to replace fluorescent strip lighting with its slim & high quality design, integrated controls options and innovative mounting accessories.

Product Features:


- High Efficacy: 130LPW;
 - AC120-277/347V, Ra>80;
 - Power & CCT adjustable;
 - 2FT/4FT/8FT, from 10W to 90W;
 - Easy installation,suspending mounting & surface mounted;
 - Emergency backup and sensor optional;
 - 5-years warranty.
- 5 Years Limited Warranty, Rated for 50,000 hours(Refer to your warranty documentation for more information.)

3PC and 5PC switchable

SPECIFICATION					
MODEL	LLSL-SK2112-D345-D1	LLSL-SK4234-D345-D1	LLSL-SK4P60-D34556-D1	LLSL-SK8P90-D34556-D1	LLSL-SK8678-D345-D1
WATTAGE	10/15/20W	24/32/40W	high bay list 20/25/30/40/60W	high bay list 40/60/70/80/90W	high bay list 60/70/80W
CCT	3500+4000+5000K		3500K, 4000K, 5000K, 5700K,6500K		3500+4000+5000K
EFFICACY	130LPW/170LPW				
CRI	Ra 80				
INPUT VOLTAGE	D1: AC120-277V / D2: AC120-347V				
POWER FACTOR	0.90				
DRIVER EFFICACY	90%				
DIMMING	0-10V				
LIFE SPAN	50,000 hrs				
WORKING TEMPERATURE	-40°F~113°F				
STORAGE TEMPERATURE	-40°F~176°F				
CABLE	150mm				
WARRANTY	5 year limited				

Wattages: 2FT/4FT/8FT, from 10W to 90W

Product Dimension:

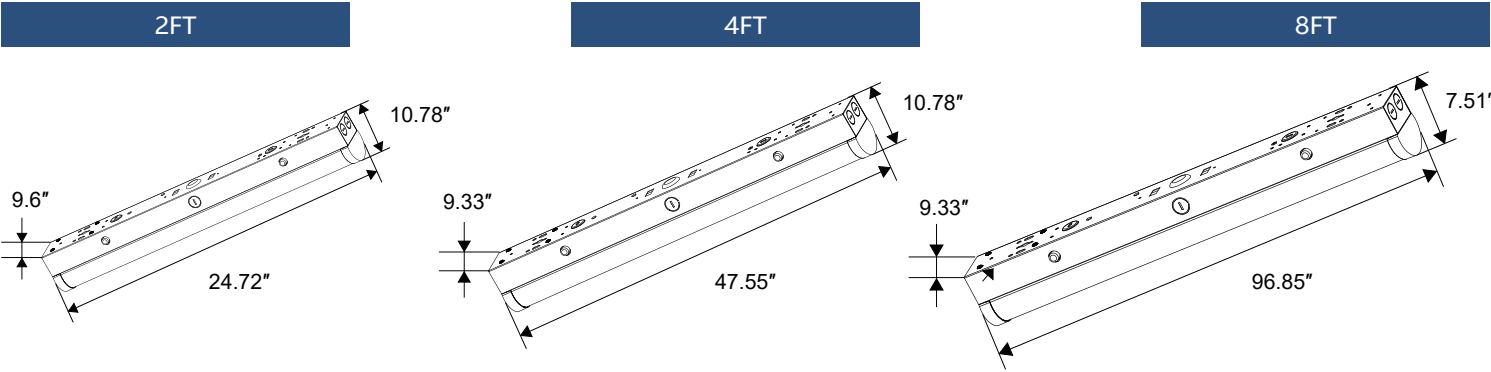


	Packing	Size	Net Weight	Gross Weight	pcs/ctn
2FT	Outer Packing Size	L24.72 * W9.6 * H10.78 inch L628 * W244 * H274 mm	22.1Lbs/ctn (10 kg/ctn)	24.3Lbs/ctn (11 kg/ctn)	9pcs/ctn
4FT	Outer Packing Size	L47.55 * W9.33 * H10.78 inch L1208 * W237 * H274 mm	32Lbs/ctn (14.5 kg/ctn)	33.1Lbs/ctn (15 kg/ctn)	9pcs/ctn
8FT	Outer Packing Size	L96.85 * W9.33 * H7.51 inch L2460 * W237 *H191 mm	37.5Lbs/ctn (17 kg/ctn)	41.9 Lbs/ctn (19 kg/ctn)	6pcs/ctn


Standard Accessories



Product Accessories(SOLD SEPARATELY):

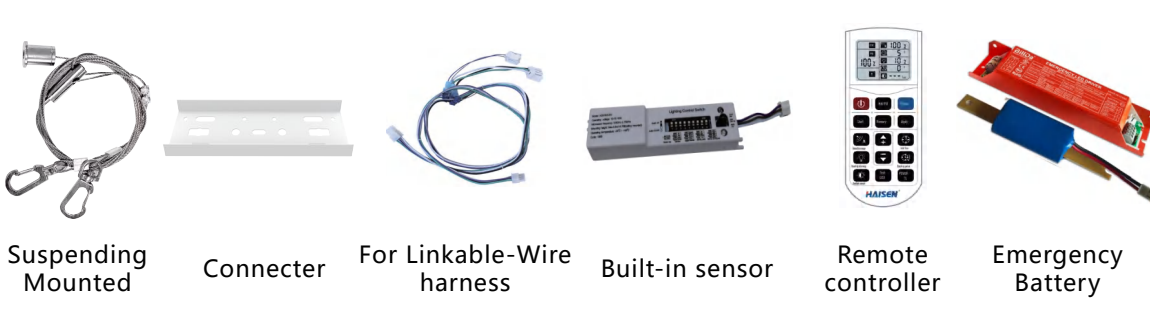

Power and CCT switchable:

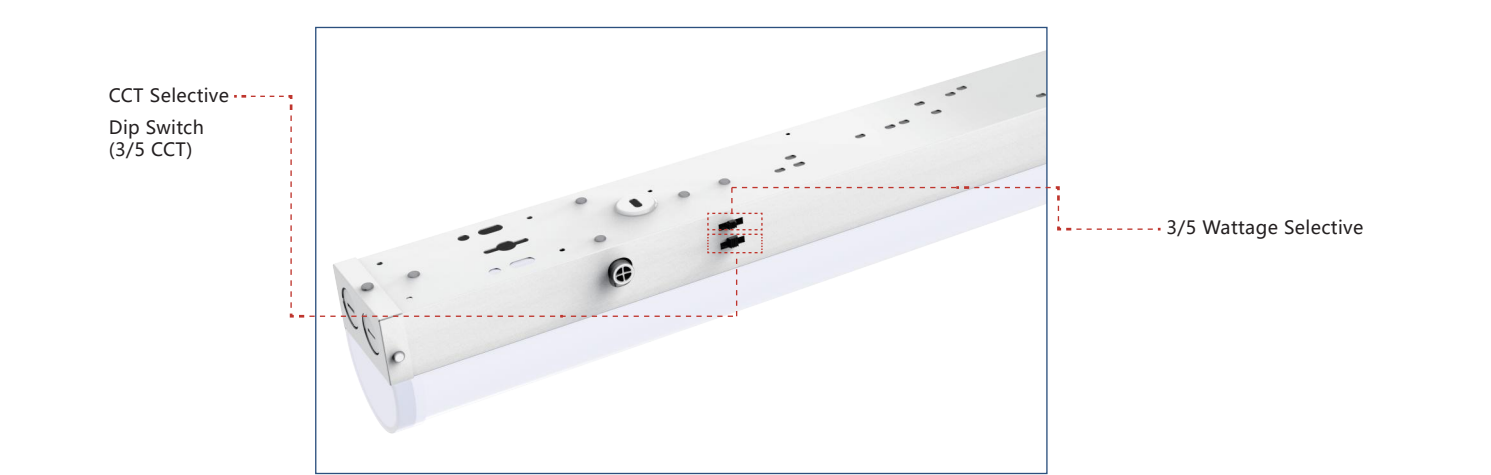

Wattages: 2FT/4FT/8FT, from 10W to 90W

ORDERING GUIDE:

EXAMPLE:


SS-SP05-4FT40W-H-xx-TCP-[A,B,C,D,Blank]-Y

SS	SP05	4FT40W	H	xx	TCP	Y
COMPANY	PRODUCT	POWER	HIGH LUMENS	INPUT VOLTAGE	Tunable CCT and Power	CONTROL
Starlake	Strip Light	20W: 10/15/20W 40W: 24/32/40W 60W: 20/25/30/40/60W 90W: 40/60/70/80/90 W 80W: 60/70/80W		Blank=120-277Vac	3500K/4000K/5000K /5700K/6500K	A = PIR sensor, B = MS sensor, C = BRT sensor, D = PHB sensor, blank = no provide sensor.


DISTRIBUTION

SS-SP05-2FT20W-H-TCP(XX)(20W, 5000K)


For complete IES files, please visit our website.

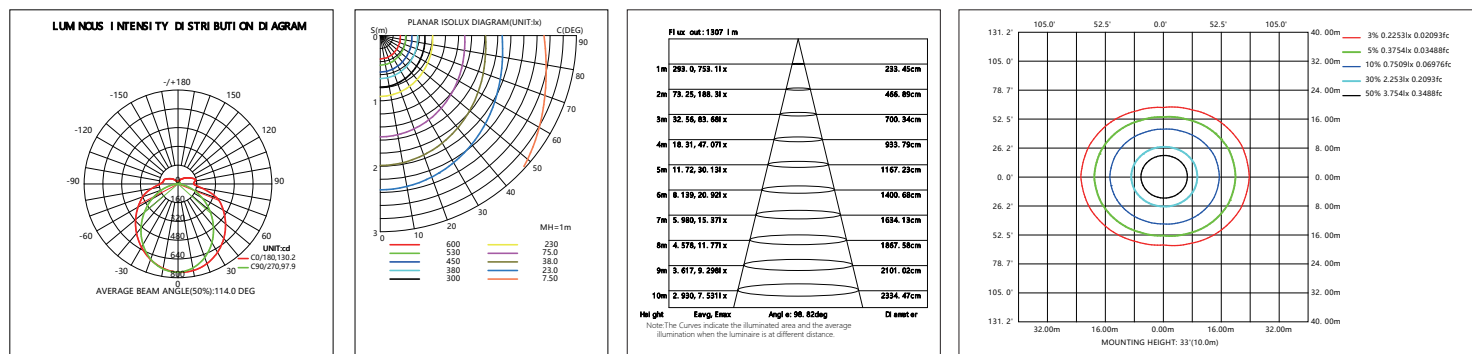

SS-SP05-4FT40W-H-TCP(XX)(40W, 5000K)

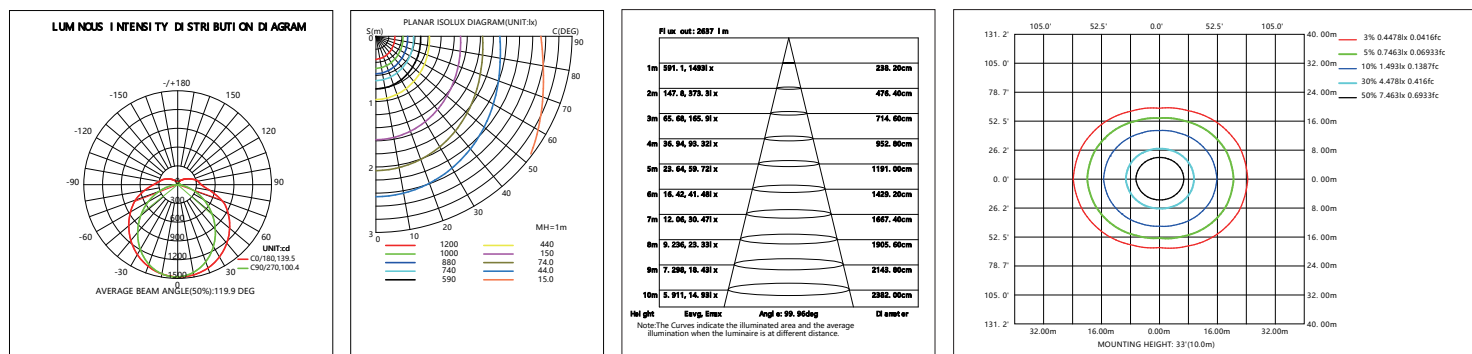


SS-SP05-4FT50W-H-TCP(XX)(50W, 5000K)

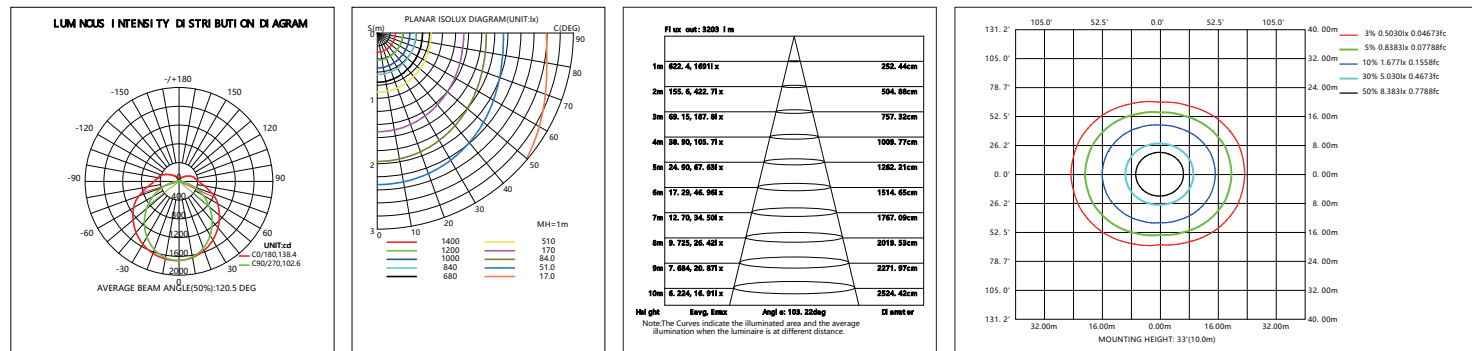


Wattages: 2FT/4FT/8FT, from 10W to 90W

Installation Instruction:


A. Surface-mounted installation

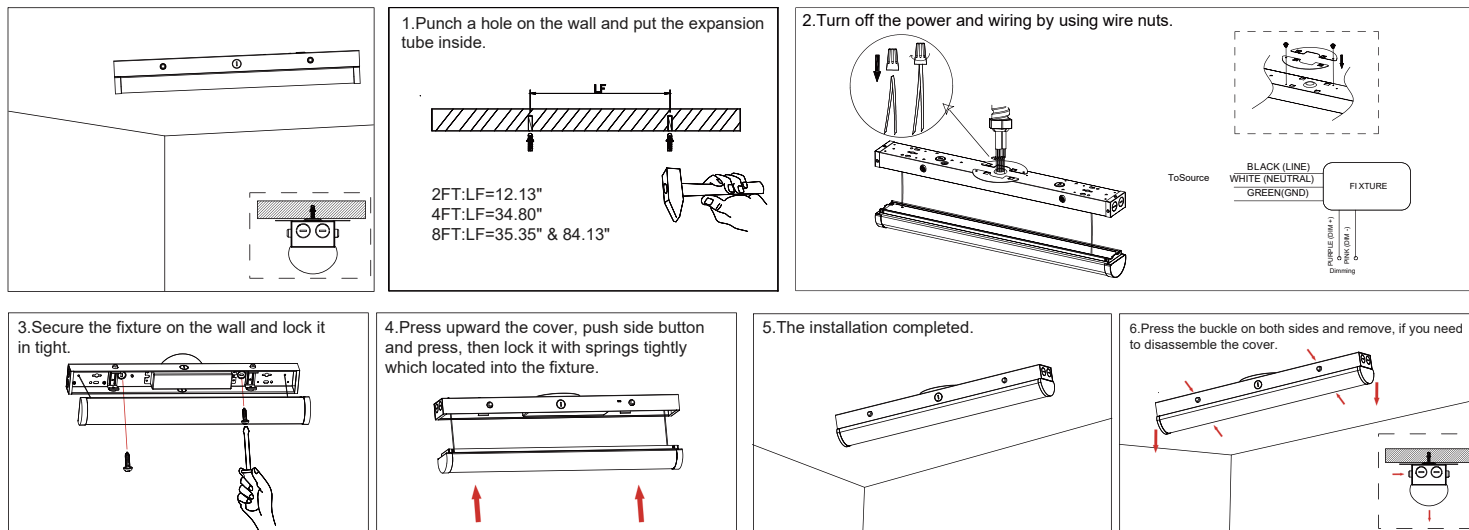

B. Suspending installation

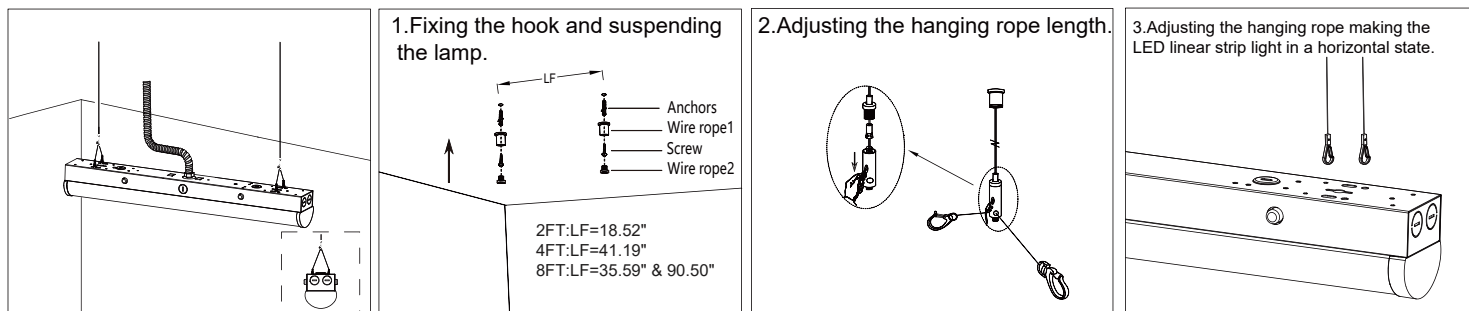


4. Turn off the power and wiring by using wire nuts.

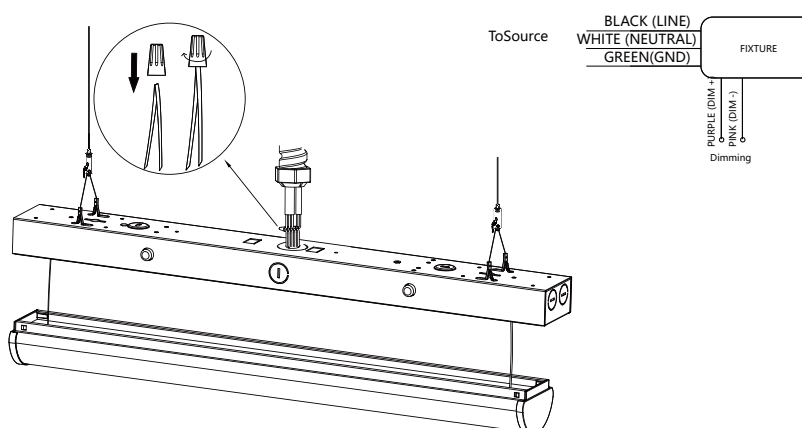

Wattages: 2FT/4FT/8FT, from 10W to 90W

Applications:

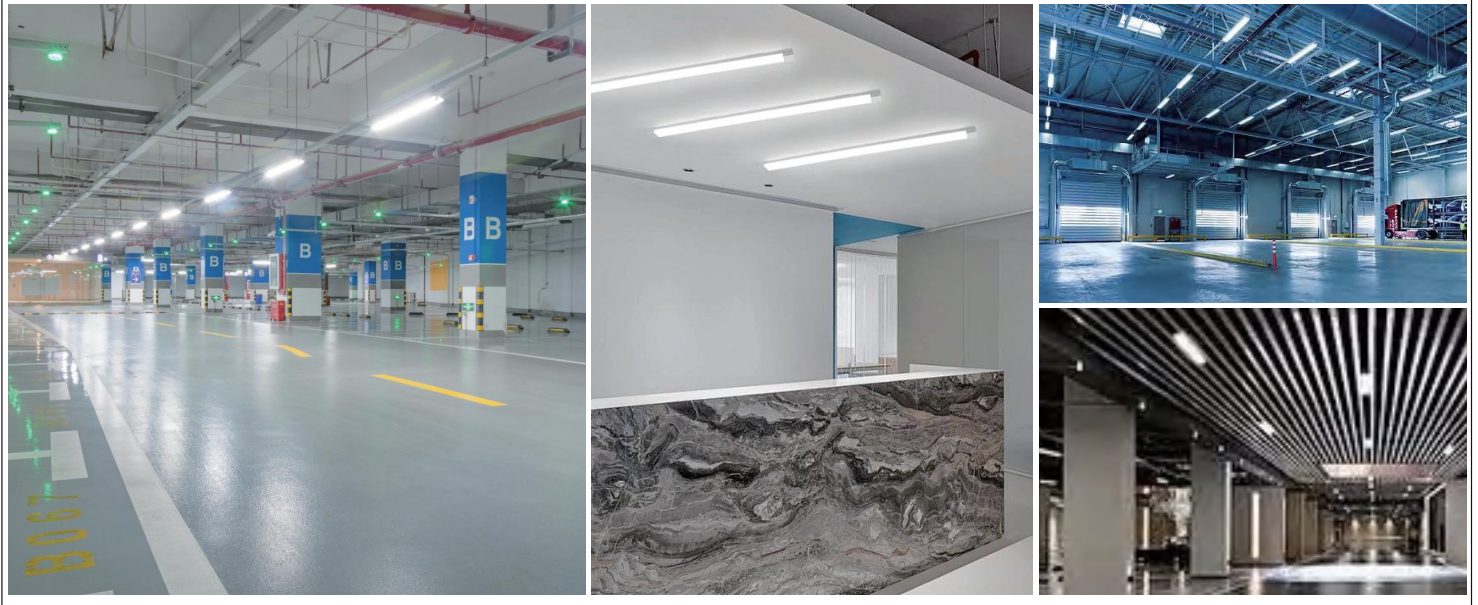

Warning:

- ⚠ Risk of fire or electric shock. Fixture installation requires knowledge of luminaires electrical systems. If not qualified, DO NOT attempt installation. Contact a qualified electrician.
- ⚠ Risk of fire or electric shock. Suitable for damp locations. Always turn off the power supply before installation.
- ⚠ Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.
- ⚠ DO NOT install fixture on unstable, loose or easily breakable surface.
- ⚠ DO NOT exert force on the surface of the fixture.

Note:

1. The installation and maintenance must be completed by electricians or professionals.
2. Please cut off the power before installation and maintenance.
3. The thermally insulating material is not allowed to cover the fixture.
4. Please keep away from the corrosive substance, and keep the fixture dry and clean.
5. Working temperature: -4°F~113°F, storage temperature: -22°F~140°F.