DEEP ROOF LIGHTING

G series cubic strip
3P4C4D



LED Cubic Hanging (Suspended) Light

Product Appearance

Available in 2',4' and 8' lengths White or Black

Up/Down distribution
0/100
10/90
20/80
30/70



5 Years warranty

DIMMERS


Product Features

- 1. 3 Power and 4 CCT field-adjustable.
- 2. Selectable direct-Indirect light distributions.
- 3. Fast and seamless continuous runs available.
- 4. I / L/ T/ X/ Y/ 120° connectors available. (I am standard.)
- 5. Multiple mount methods.
- 6. Sensor solution ready.
- 7. EM available on 4ft and 8ft models.


Fast and seamless connection

Screw-free to remove end-cover.
Tool-free press lock connection.

Slide joint with current

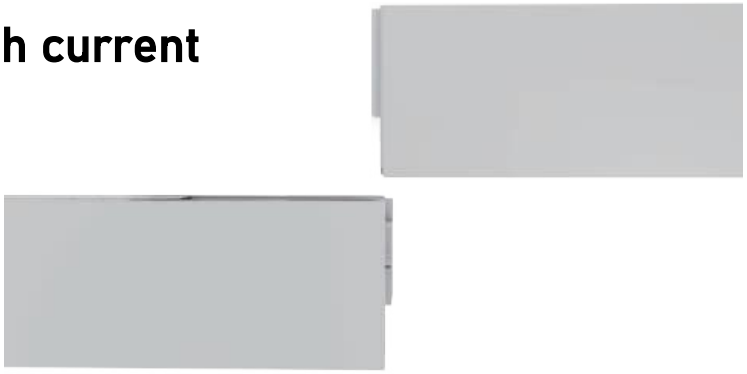

Product Dimension

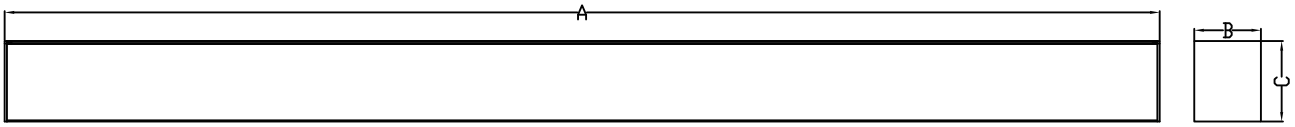



Mode	size	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)
LLSQ-G225-3P4C4D-D1	2FT	24.5″ 623mm	2.2″ 55mm	3.2″ 82mm
LLSQ-G450-3P4C4D-D1	4FT	48.1″ 1223mm	2.2″ 55mm	3.2″ 82mm
LLSQ-G880-3P4C4D-D1	8FT	95.7″ 2431mm	2.2″ 55mm	3.2″ 82mm


Append -W (for white)
Append -B (for black),


Connector dimensions (Optional)


Size unit: inch(mm)

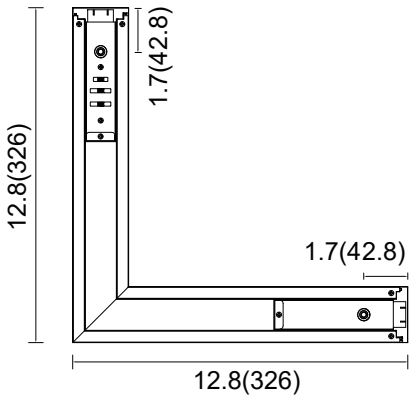

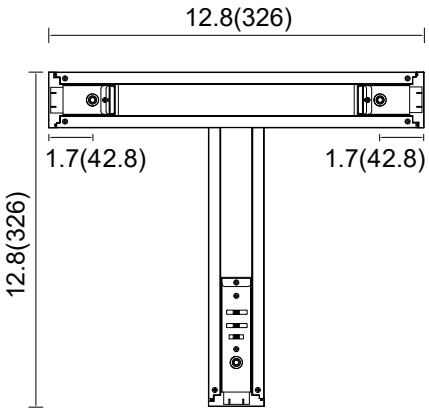

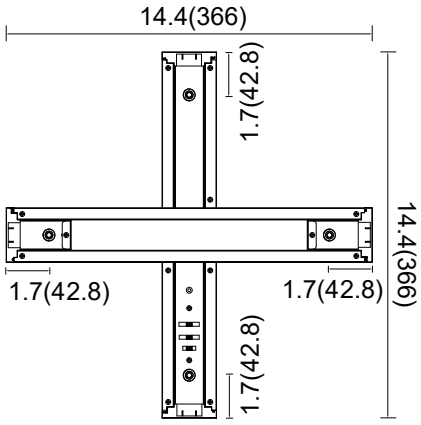

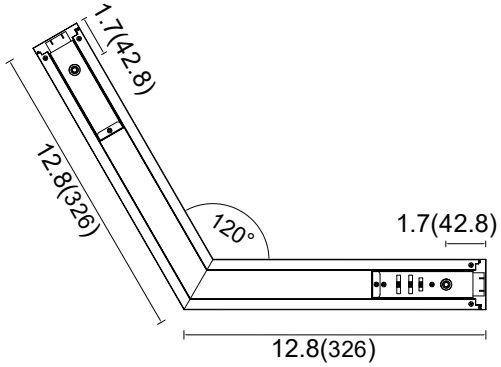


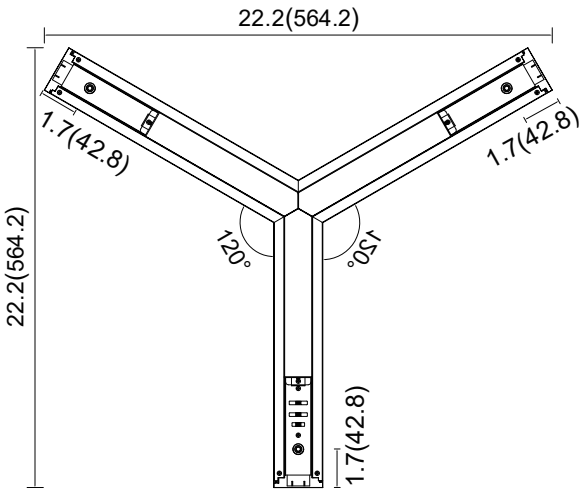

Specification

Mode	Size	Power	Input Voltage	Dimmable	PF	Light Efficacy	Ra	CCT
LLSQ-G225-3P4C4D-D1	2FT	15W-20W-25W	AC120-277V	0-10V	>0.9	130 lm/W	80	3500K 4000K 5000K 6500K
LLSQ-G450-3P4C4D-D1	4FT	40W-45W-50W						
LLSQ-G880-3P4C4D-D1	8FT	60W-70W-80W						

Append -W (for white)
Append -B (for black),

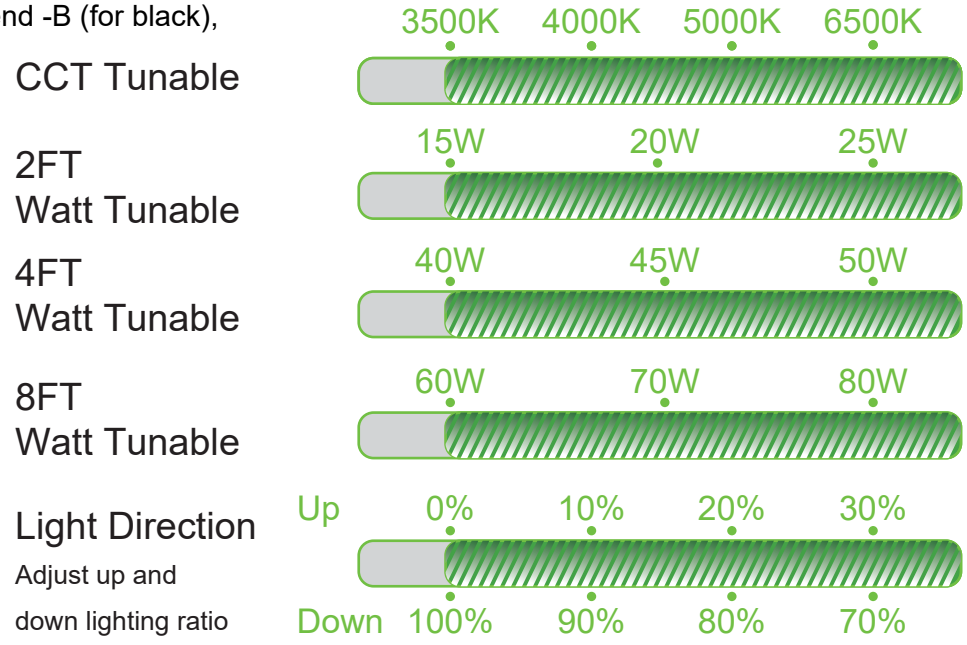

Mounting

Suspended mount, Surface mount, Wall mount, and Recessed mount are available.
Accessories for all types except Suspended mount must be purchased separately.




Suspended mount
LLSQ-G-SUS22




LLSQ-G-BB
Binding Bracket

Surface mount

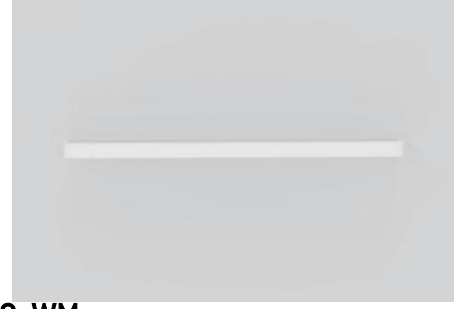

LLSQ-G-WM
Wallmount kit


Wall mount

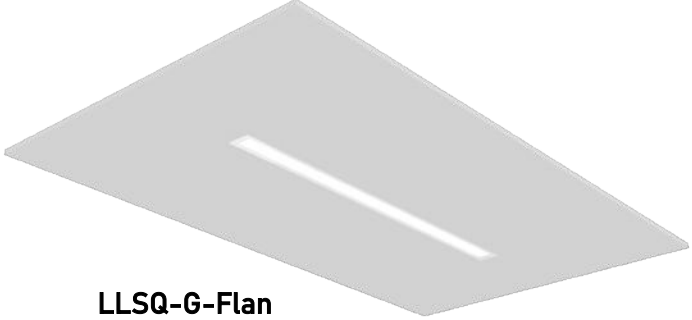

LLSQ-G-Flan
Flange kit

Recessed mount

Connections

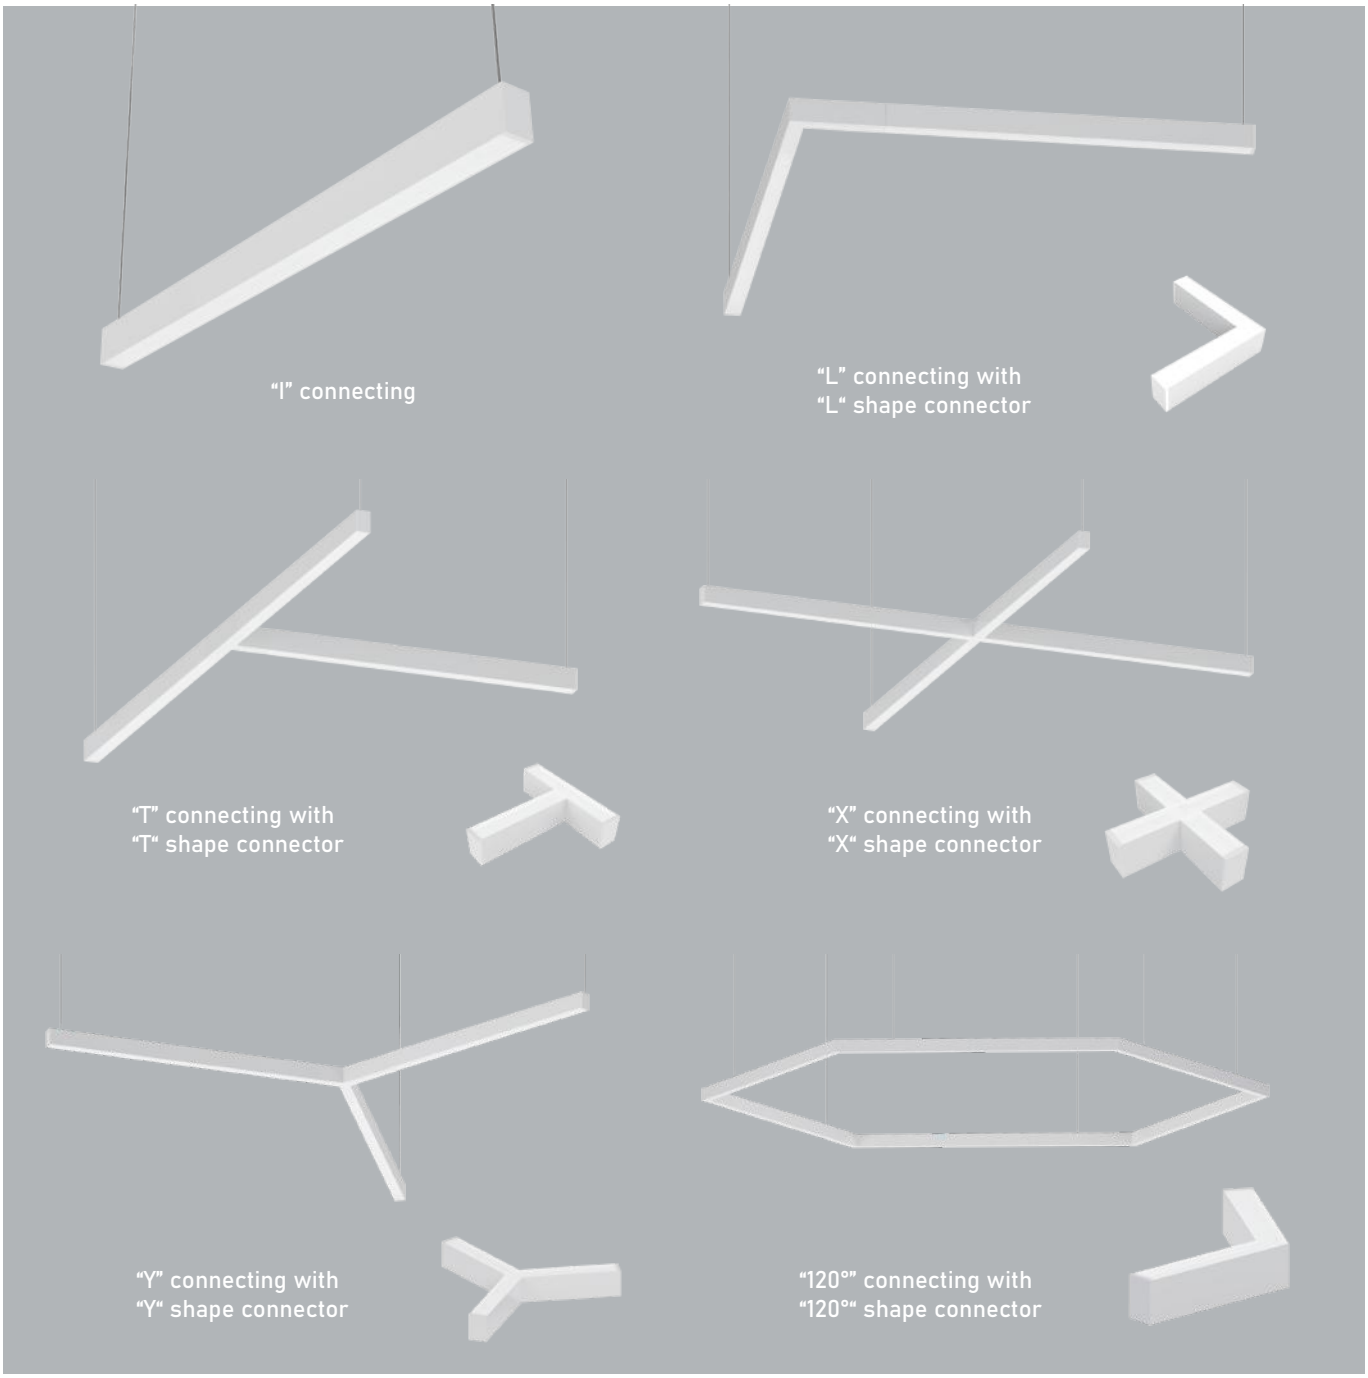

Change to DIY soft lens which can be cut by end-users for seamless continuous runs.
Total connected load is <500W at 120Vand ⩽1000W at 277V which included the connectors.


Max. No.* of each Power feed

Size / Power	AC 120V	AC 277V
2FT / 25W	19 PCS	38 PCS
4FT / 50W	9 PCS	19 PCS
8FT / 80W	6 PCS	12 PCS


one circuit suggestion

Installation accessories (Optional)


"L" connector **LLSQ-GJ-L**

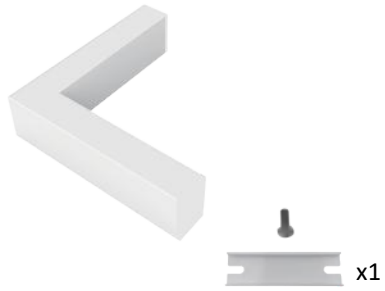


"T" connector **LLSQ-GJ-T**



"X" connector **LLSQ-GJ-X**



"Y" connector **LLSQ-GJ-Y**



Append -W (for white)
Append -B (for black),


"120°" connector **LLSQ-GJ-120**



Suspension mount kit


Standard equipment. Others are optional.

LLSQ-G-SUS22

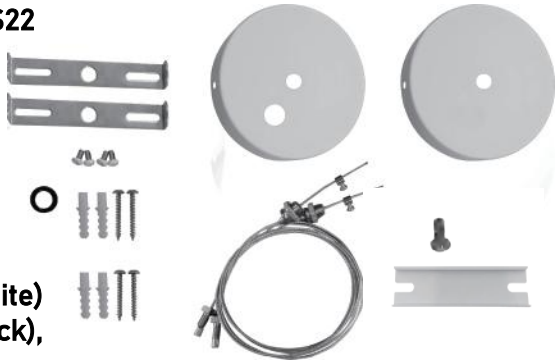

Append -W (for white)
Append -B (for black),


LLSQ-G-PC

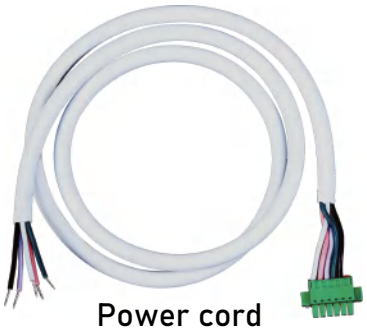

Power cord

Sensor Connector

LLSQ-G-SR-E



Append -W (for white)
Append -B (for black),

AC sensor installation canopy kit (sensor installed)

LLSQ-G-SR-CP



Soft DIY-cut diffuser, 49.2' length per roll

LLSQ-G-DR




Note: Subject to change without notice. Errors and omission excepted.
Always make sure to use the most recent release

Packing/weight

DLC CODE

Part NO.	Outer Carton Size (LxWxH)	Qty/Carton (pcs)	Net weight (kg)(lbs)	Gross weight (kg)(lbs)	20GP (QTY)	40HQ (QTY)
LF-2FT-25W-L-H	876x192x202mm (34.49″x7.56″x7.95″)	6PCS	1.3 kg (2.87 lbs)	12 kg (26.46 lbs)	4992	11172
LF-4FT-50W-L-H	1476x192x202mm (58.11″x7.56″x7.95″)	6PCS	2.2 kg (4.85 lbs)	18 kg (39.68 lbs)	2952	6708
LF-8FT-80W-L-H	2475x135x229mm (97.44″x5.31″x9.02″)	4PCS	4.1 kg (9.04 lbs)	20 kg (44.09 lbs)	1376	3340

Packing

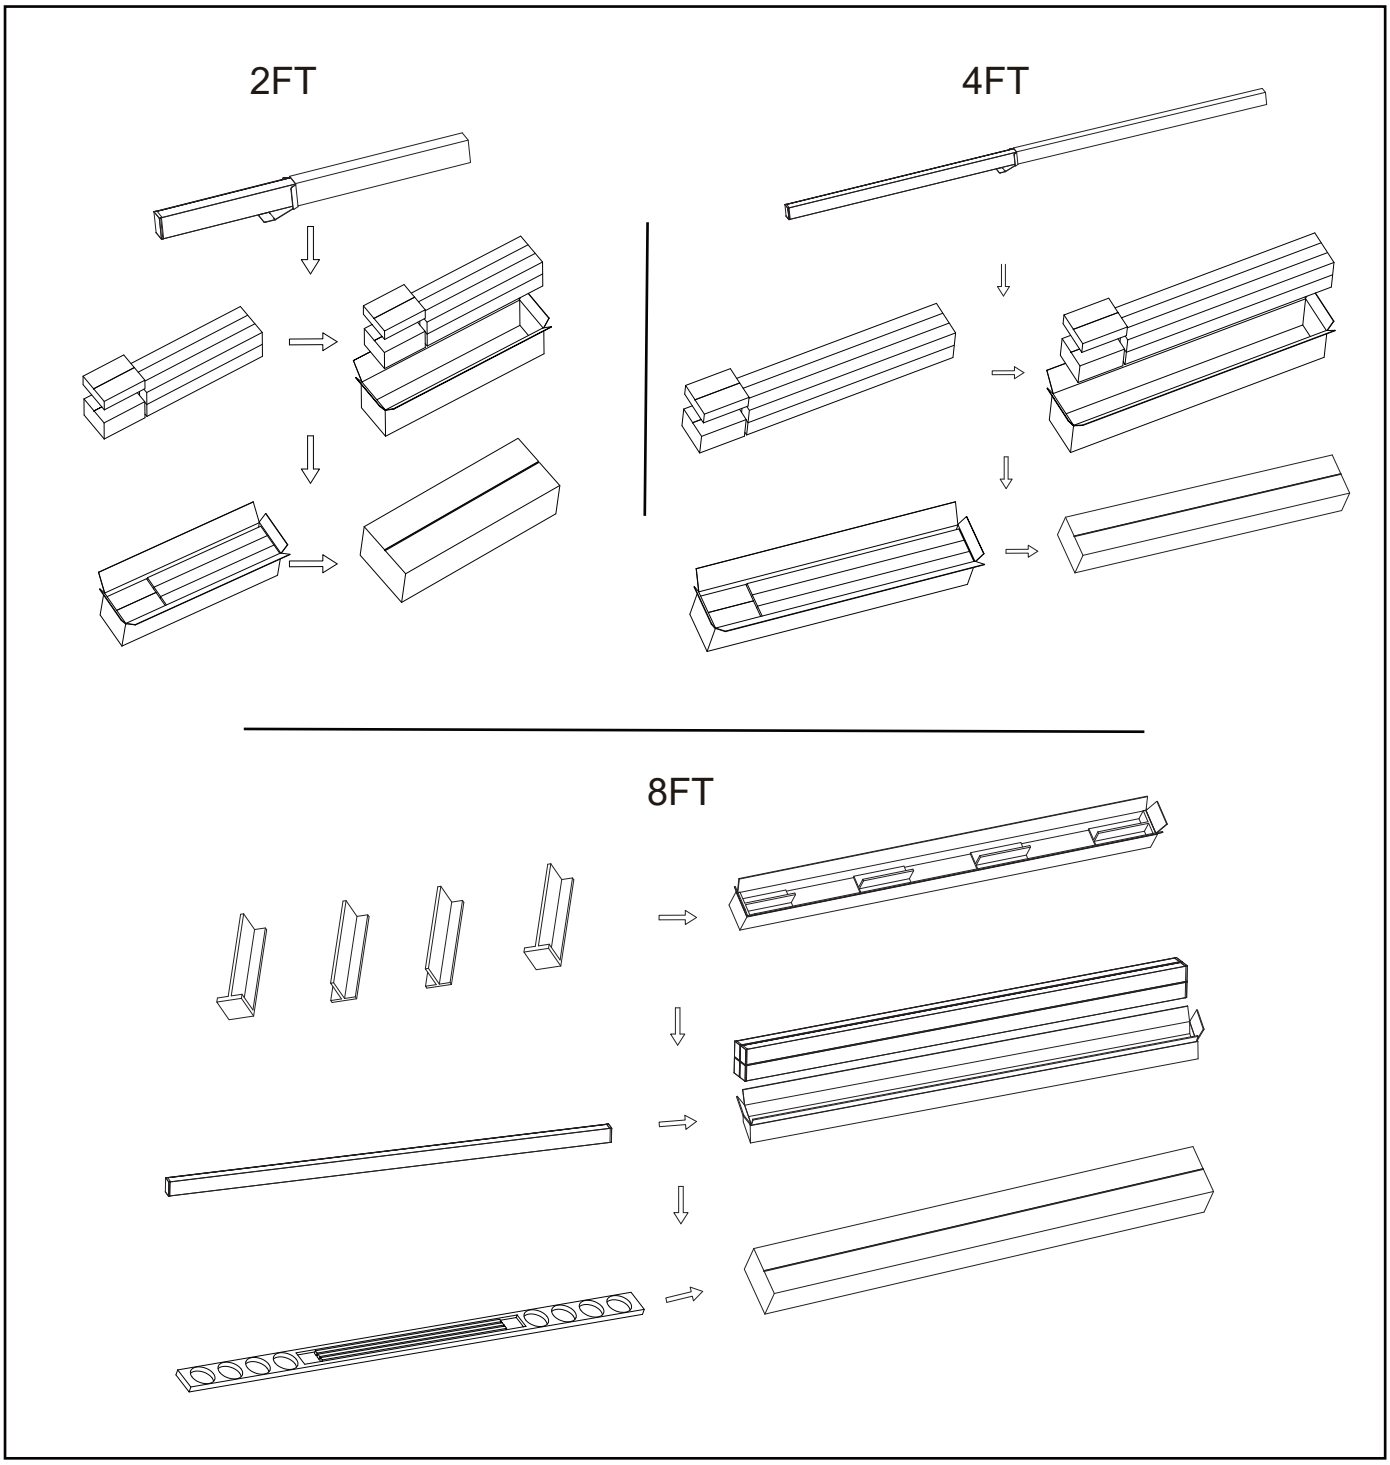

LED Linear Hanging (Suspended) Light





Note

1. The installation and maintenance must be completed by electricians or professionals.
2. Please cut off the power before installation and maintenance.
3. The fixture is not allowed to be covered by thermally insulating material.
4. Please keep away from the corrosive substance, and keep the fixture dry and clean.
5. Working tempe: -4°F~104°F, storage temperature: -22°F~140°F.