DEEP ROOF LIGHTING

J series strip high bay listed

5CCT & Power Selectable, 3 types of lens changeable



Description

The commercial strip light is an ideal solution for retail, parking garages, and store applications. Comes with a 5 CCT & wattage DIP switches with three types of changeable lenses, which allows the customer to choose the most suitable color temperature, lumens output, and lighting distribution for projects. Housing constructed of cold-rolled steel makes it very durable yet light in weight. With a high-transmission PC lens, and the efficacy can reach up to 140LM/W.

Application

- Warehouses
- Parking Garage
- Stores
- Supermarket
- Retails

Certificate

- ETL
- DLC

5CCT SELECTABLE

5Watts SELECTABLE


C ETL LISTED US Intertek

DLC QPL DLC LISTED PREMIUM

WARRANTY 5 YEARS

Key Features

- 5CCT(3000/3500/4000/5000/6500K) and Wattages Selectable.
- 120-277VAC & 120-347VAC for options.
- High efficacy up to 140LM/W.
- 4ft 60W meet DLC high bay list.
- Microwave motion sensor and PIR sensor available.
- Emergency battery backup available.
- Standard V-hooks accessory for chain pendant and suspended mounting, additional surface mounting is available.

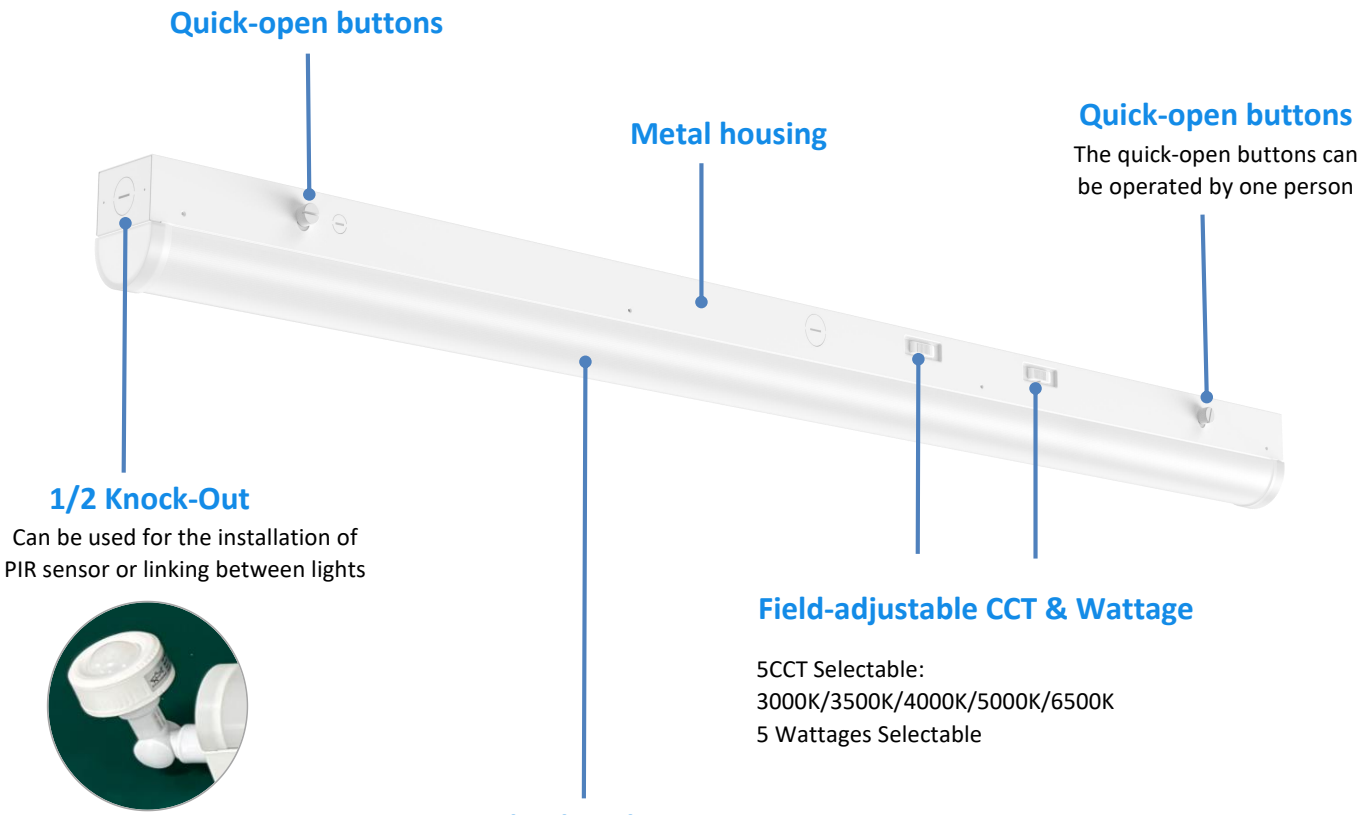



Round Diffuse Lens

Performance Summary

DRL Item code DLC Model NO. #	Size (ft/mm)	Watts	CCT	LPW	Lumens(±10%)	Voltage	DIM	CRI	Beam Angle
LLSL-J220-5PC-D1 LP03R-2-20Z-A5C5	2FT 610*75*82.5mm	20+18+16+14+12W Selectable	5CCT Selectable 3000K 3500K 4000K 5000K 6500K	140LM/W	2800LM @20W	AC120V-277V	0-10V	>80	120°
LLSL-J440-5PC-D1 LP03R-4-40Z-A5C5	4FT 1220*75*82.5mm	40+35+30+25+20W Selectable			5600LM @40W				
LLSL-J460-5PC-D1 LP03R-4-60Z-A5C5	4FT 1220*75*82.5mm	30+35+40+50+60W high bay list		160LM/W	10000LM@60W				
LLSL-J880-5PC-D1 LP03R-8-80Z-A5C5	8FT 2440*75*82.5mm	80+70+60+50+40W high bay list		140LM/W	11200LM @80W				

Remarks: All above efficacy and lumens are subject to 4000K, please check IES files for accurate data.
LP03Y-X-XXZ-A5C5, Y denote type of lens, R=Round diffuse lens, F=Flat diffuse lens, W=Wide diffuse lens;
X denote length; XX denote wattage; Z denote voltage, L=AC120-277V, M=AC120-347V;
CCT & Power Selectable models ship preset at the highest CCT and the highest wattage.

Performance


- LED Type: SMD2835
- Frequency: 50/60Hz
- Dimming: 0-10V Dimming
- Power Factor: ≥0.90
- Life Time: 50,000Hrs
- IP Rating: IP20
- Operating Temp.: −13°F to 104°F (-25°C to +40°C)
- Sensor: Microwave Motion Sensor/PIR Sensor
- Emergency driver: 4W for 2ft and 4ft;
  8W for 8ft.

Construction

- Lens: Frosted Polycarbonate
- End caps: Frosted Polycarbonate
- Housing: SPCC
- Finish: White

Mounting

- Chain Pendant
- Suspended Mount
- Surface Mount

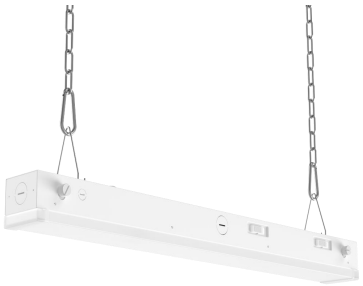

Chain Pendant



Surface Mount

Accessories (Sold separately)

LLSL-J-SSP



Chain pendant kits



Suspended mount kits

Surface Mount kits



Linkable mounting bracket

LLSL-J-EM1



Emergency Driver
(Helpower)

LLSL-J-WG



wire Safe Guard



Microwave motion sensor
(Haisen)

LLSL-J-OS1



Microwave motion sensor
(Merrytek)





PIR motion sensor
(Sharkward)


Product Dimension

(unit: mm & inch)

Round Diffuse Lens

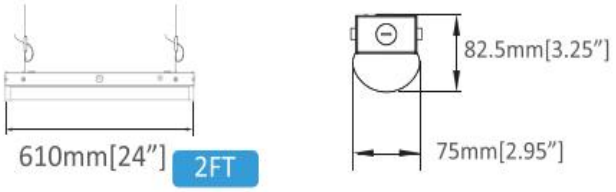

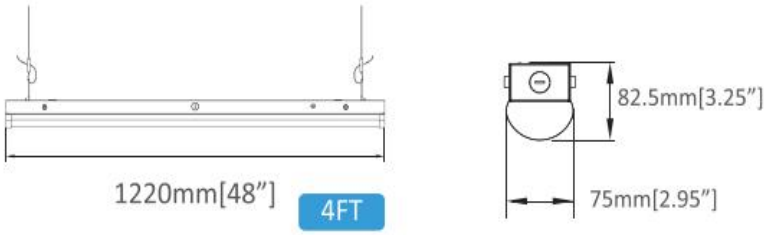

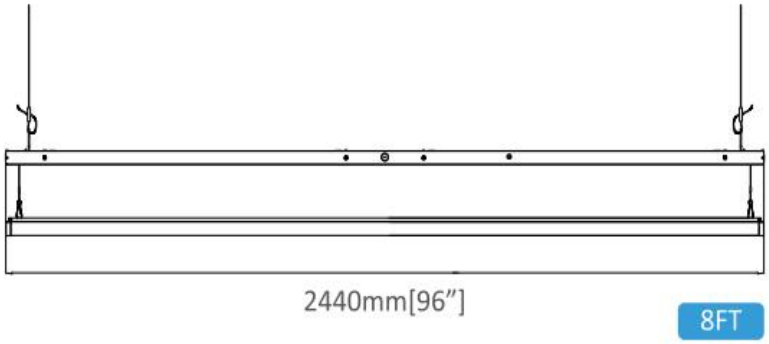

Packing Info.(No inner box)

Sizes	Product & Package Weight (KG)		Carton Size (mm&inch)	QTY/CTN (PCS)	20GP (PCS)	40HQ (PCS)
	N.W./PC	G.W./CTN				
LLSL-J220	0.75	5.3	625×250×180mm 24.61"x9.84"x7.09"	6 PCS	5904	13104
LLSL-J460	1.48	9.2	1235×250×180mm 48.62"x9.84"x7.09"	6 PCS	2808	6552
LLSL-J880	2.75	12.8	2455×148x172mm 96.65"x5.83"x6.77"	4 PCS	1440	3360