



DEEP ROOF LIGHTING

UFO SV 3PC

Also 400, 500W 3PC



LED High Bay Light

UFO-SV Series



Features


- Multiple functions: Motion sensor, DALI, Zigbee, 1-10V and other smart dimming are your options..
- High luminous efficiency and stability with using the world-class accessories(LEDs/Driver/etc.).
- Long lifetime with excellent thermal design,high degree of protection with the Die-cast aluminum integrated structure.
- Certificate: ETL, DLC, CE, RoHS, ERP.

Applications

- Factories
- Warehouses
- Cold storage room
- Shopping malls
- Exhibition hall
- Toll Stations
- Gymnasium

Options

| Model | Power | Input | Beam angle | Lumen | Power Factor | CCT | CRI | Size(mm) Included ring height | Net Weight | Warranty |
|-------------------|----------------------|------------|-------------|---------|--------------|---|-----|----------------------------------|------------|----------|
| LHBO-SV100-3PC-D1 | 100W 80W 60W | AC100-277V | 60° 90°120° | 150lm/W | >0.95 | 3500K 4000K 5000K 3CCT Selectable | >80 | 255x255x162mm | 1.8kg | 5 years |
| LHBO-SV150-3PC-D1 | 150W 120W 100W | AC100-277V | 60° 90°120° | 150lm/W | >0.95 | | >80 | 255x255x162mm | 1.8kg | 5 years |
| LHBO-SV200-3PC-D1 | 200W 150W 100W | AC100-277V | 60° 90°120° | 150lm/W | >0.95 | | >80 | 300x300x177mm | 2.5kg | 5 years |
| LHBO-SV240-3PC-D1 | 240W 200W 150W | AC100-277V | 60° 90°120° | 150lm/W | >0.95 | | >80 | 365x365x177mm | 3.0kg | 5 years |

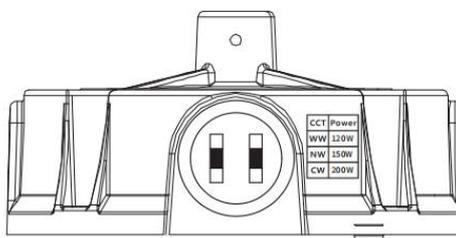




MC079D 99 Z



Microwave sensor - LHBO-SV-OS

Remote Handset - LHBO-SV-RH


Dimensional drawing

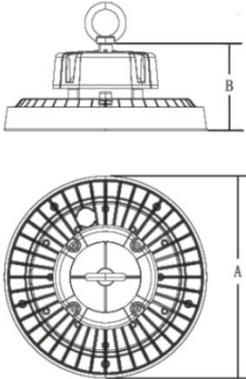

| Model | A mm(inch) | B mm(inch) |
|-------------------|---------------|---------------|
| LHBO-SV100-3PC-D1 | 255 (10.03) | 162 (6.38) |
| LHBO-SV150-3PC-D1 | 255 (10.03) | 162 (6.38) |
| LHBO-SV200-3PC-D1 | 300 (12.01) | 177 (6.97) |
| LHBO-SV240-3PC-D1 | 365 (14.37) | 177 (6.97) |

Installation

1. Please turn off the power before operation.
2. LED lamp is extremely bright. To avoid possible damage to the eyes, do not stare into LED beam.
3. Please check the working voltage of product from the product label, do not exceed the working voltage range.
4. Input product line: brown or black is **L**, blue or white is **N**, yellow-green or green is **GND**.
5. Be sure wiring is closed and prevent leakage, when installing.
6. Please install and use the product under local fire regulations.

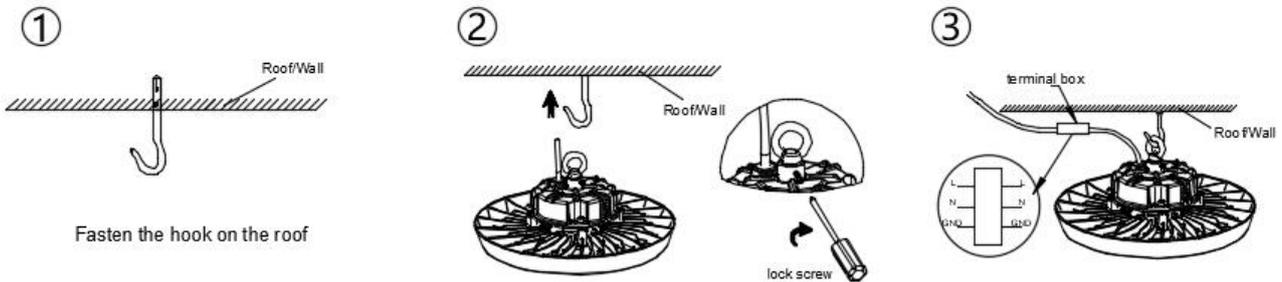

Packaging information

| Model | Carton size | N.W. (kg) | G.W (kg) | QTY. (PCS) | 20'Container (PCS) | 40'Container (PCS) |
|-------------------|-------------|--------------|--------------|---------------|------------------------|------------------------|
| LHBO-SV100-3PC-D1 | 56x30x45cm | 12.5 | 13.0 | 6 | | |
| LHBO-SV150-3PC-D1 | 56x30x45cm | 12.5 | 13.0 | 6 | | |
| LHBO-SV200-3PC-D1 | 60x35x36cm | 10.0 | 10.5 | 4 | | |
| LHBO-SV240-3PC-D1 | 60x41x42cm | 12.5 | 13.0 | 4 | | |



PC Reflectors and Bottom Cover

100+150+200 W

LHBO-SV200-PCR





LHBO-SV200-PCR-BC

100+150+200 W


LHBO-SV200-PCR-TA

LHBO-SV200-PCR-BC-TA

240 W

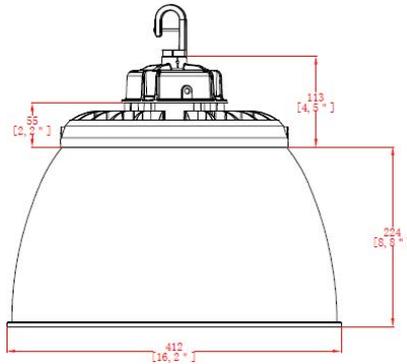

Unit: mm





DEEP ROOF LIGHTING

SV series 400 500 W 3PC



240+300+400W
3000+4000+5000K

300+400+500W
3000+4000+5000K

LED High Bay Light

UFO-400W/500W



Features

- Universal 120-277VAC input voltage.
- High luminous efficiency and stability with using the world-class accessories(LEDs/Driver/etc.).
- Long lifetime with excellent thermal design,high degree of protection with the Die-cast aluminum integrated structure.
- Operating Temperature Range: -30°C to 45°C
- Certificate: ETL, DLC, CE, RoHS, ERP.

Applications

- Factories
- Warehouses
- Cold storage room
- Shopping malls
- Exhibition hall
- Toll Stations
- Gymnasium



Compatible with ZHAGA base




Bracket mount + lampshade

Options


| Model | Power | Input | Beam angle | Lumen | Power Factor | CCT | CRI | Size(mm) | Net Weight | Warranty |
|-------------------|-------|------------|-------------|---------|--------------|------------|-----|---------------|------------|----------|
| LHBO-SV400-3PC-D1 | 400W | AC100-277V | 30°\60°\90° | 150LM/W | >0.95 | 3000-6500K | >80 | 450x450x166mm | 6.1kg | 5 years |
| LHBO-SV500-3PC-D1 | 500W | AC100-277V | 30°\60°\90° | 150LM/W | >0.95 | 3000-6500K | >80 | 450x450x166mm | 6.1kg | 5 years |

Dimensional drawing

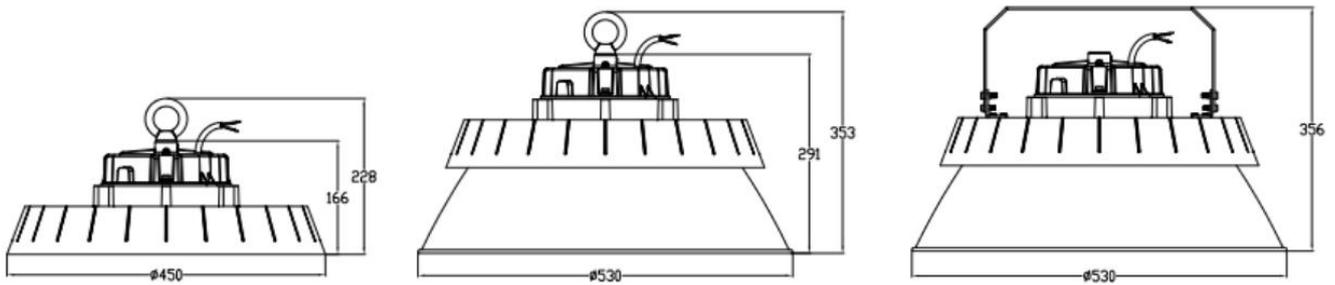

Installation

1. Please turn off the power before operation.
2. LED lamp is extremely bright. To avoid possible damage to the eyes, do not stare into LED beam.
3. Please check the working voltage of product from the product label, do not exceed the working voltage range.
4. Input product line: brown or black is **L**, blue or white is **N**, yellow-green or green is **GND**.
5. Be sure wiring is closed and prevent leakage, when installing.
6. Please install and use the product under local fire regulations.

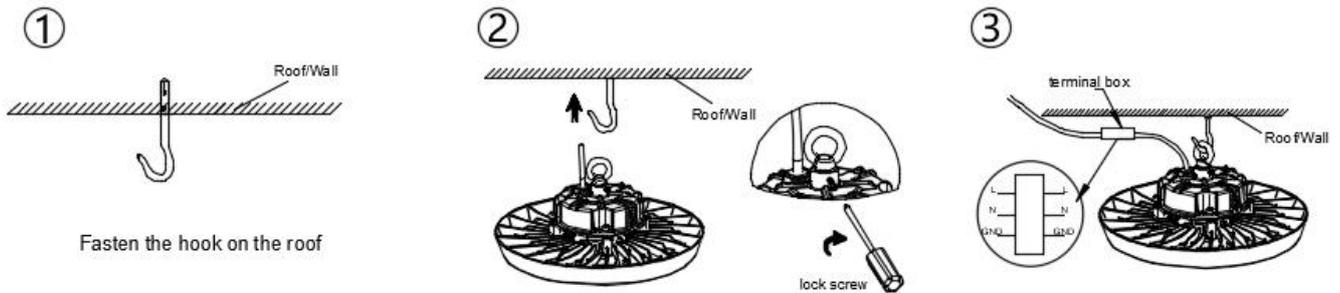

Packaging information

| Model | Carton size | N.W. (kg) | G.W (kg) | QTY. (PCS) | 20'Container (PCS) | 40'Container (PCS) |
|-------------------|-------------|--------------|--------------|---------------|------------------------|------------------------|
| LHBO-SV400-3PC-D1 | 52x52x23CM | 6.1 | 7.2 | 1 | 620 | 1200 |
| LHBO-SV500-3PC-D1 | 52x52x23CM | 6.1 | 7.2 | 1 | 620 | 1200 |